
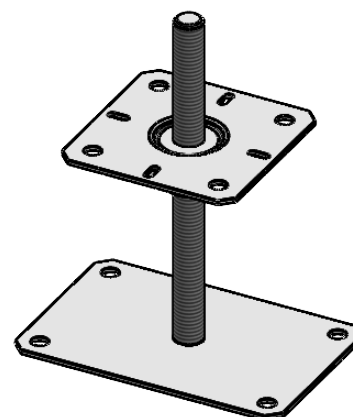


Rewizja				
Rewizja	Opis	Data	Zmienil	Zatwierdził
A	Zmiana wielkości otworów w podstawie z $\varnothing 11$ na $\varnothing 12$ mm	17.05.2021	D.Kozłowski	

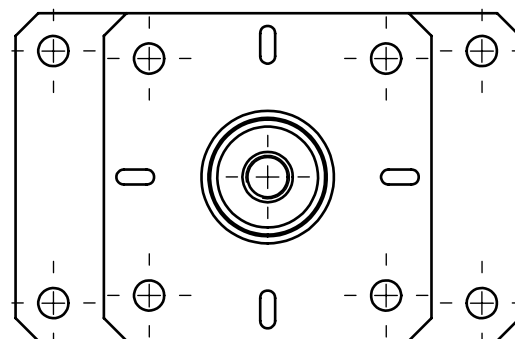

Technical drawing of a rectangular plate with the following specifications:

- Overall dimensions: 200 (width) x 130 (height).
- Inner dimensions: 170 (width) x 100 (height).
- Corner chamfers: $9 \times 45^\circ$ at all four corners.
- Central hole: Diameter $\Phi 20$.
- Four corner holes: Each with a diameter of $\Phi 12$, indicated by the label $4 \times \Phi 12$.

1. Tolerancje ogólne wg. normy PN-EN 22768 mK.
2. Ostre krawędzie stępić.
3. Zabezpieczenie antykorozyjne Fe/Zn 12 wg PN-EN ISO 2081.

4	2		Nakrętka	M20-5 DIN 934	S235	
3	1	12477	Pręt gwintowany S235 M20x250mm surowy DIN 976 4.8	Pręt gwintowany M20x247 [mm]	1.0037 (S235JR)	0.60
2	1	1520200	Podstawa dolna do PRSP 130 Ø 20	PSRP 130 M20 -P	1.0037 (S235JR)	0.59
1	1	1520130	Podstawa do PSR 130 M20 Ø 20 (PSR Z i PS Z)	PSR 130 M20-R	1.0037 (S235JR)	0.41
Poz.	Ilość	Indeks	Nazwa	Numer części	Materiał	Masa
D.Kozłowski		-		-		11,10 dm ²
Projektował		Sprawdził		Zachwycił		Waga
D.Kozłowski		A4		1:3		1.62 kg
Kreśli		Format		Skala		Materiał
4882130		17.05.2021		PRSP 130 M20		1 / 1
Indeks		Data		PRSP 130 M20		1 / 1
domax						1 / 1
DOMAX Sp. z o.o.						1 / 1